


NOTE:

A MANHOLE SAFETY LANDING SHALL BE PLACED MID-WAY BETWEEN THE TOP OF THE BENCH AND THE TOP OF THE FRAME AND COVER IN MANHOLES EXCEEDING 25 FEET (7.6 m) IN DEPTH.

30" (760 mm)
FRAME & COVER
PER STD. DET.
WWM 214 215

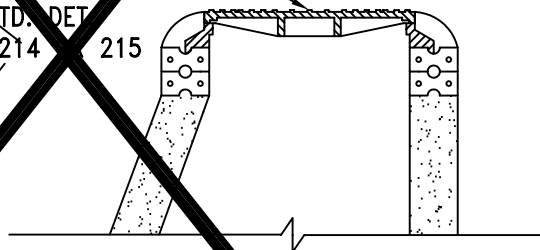

FIBERGLASS GRATING 26" (660 mm) DIA.
BY 1" (25 mm) DEPTH 1KG BORDEN
OR APPROVED EQUAL *

ELEVATION OF PRECAST
CONCRETE SLAB SAFETY
LANDING AS PER PLANS

1'-6"
(460 mm)
(MAX.)

RAM-NEK SEAL OR
APPROVED EQUAL

6" (MAX.)
(150 mm)

24" (610 mm) Ø
OPENING

4" (100 mm)

48" OR 60" I.D. MANHOLE
(1.22 m) (1.53 m)

6" x 6" - D6 x D6
(152 mm x 152 mm -
MW 19 x MW 19) WWF

* SHOP DRAWINGS REQUIRED

ISSUED:

8/92

DELETED

7/02



STANDARD DETAIL
PRECAST CONCRETE
MANHOLE
SAFETY LANDING



DETAIL NO.

WM
222

SHEET 1 OF 1